


GTX SERIES

GTX Scrubber
Specifications

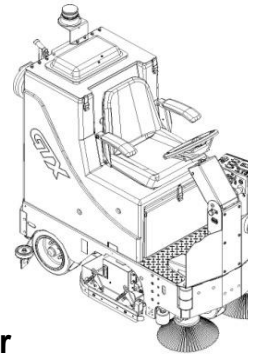

	Disc	Cylindr
BODY CONSTRUCTION / DIMENSIONS		
Tank Material:	Poly (3/8" thick)	Poly (3/8" thick)
Chassis Construction:	3/16" Steel	3/16" Steel
Rear Wheels (diameter x width):	(2) 12" x 5"	(2) 12" x 5"
Size (L x W x H):	54" x 26" x 55"	54" x 26" x 55"
Weight:	780 lbs.	780 lbs.
Weight (w / 245 ah batteries):	1,222 lbs.	1,222 lbs.
BRUSH SYSTEM:		
Brush Size:	26D: (2) 13" 30D: (2) 15" 34D: (2) 17"	24C: (2) 22" 27C: (2) 25" 30C: (2) 28" 34C: (2) 32"
Standard Brush Motor:	(2) 0.75 hp / 300 rpm	(2) 0.75 hp / 350 rpm
Optional Brush Motor:	(2) 1.0 hp / 350 rpm	NA
Brush Speed:	300 rpm	750 rpm
Brush Down Pressure:	0-250 lbs.	0-250 lbs.
Actuator Rating	500 lbs.	500 lbs.
BATTERY SYSTEM:		
System Voltage:	36 volts	36 volts
Standard Battery Rating:	245 AH	245 AH
Optional Battery Rating:	325 AH	325 AH
Battery Run Time:	Up to 7 hours	Up to 7 hours
Charger (110-v / 60 Hz / 24-volt):	36-v / 25 amp	36-v / 25 amp
SOLUTION SYSTEM:		
Solution Tank Capacity:	35 gal.	35 gal.
Solution Flow Rate:	0-1.5 gpm	0-1.5 gpm
Solution Filter:	Stainless Inline	Stainless Inline
RECOVERY SYSTEM:		
Recovery Tank Capacity:	35 gal.	35 gal.
Vacuum Power:	1.0 hp	1.0 hp
Drain Hose:	2.0" Diameter	2.0" Diameter
Vacuum (lift / airflow):	68" / 70 cfm	68" / 70 cfm
Demisting Chamber:	3 gal.	3 gal.
DRIVE SYSTEM:		
Power:	1.0 hp, sealed	1.0 hp, sealed
Speed Control:	Variable 0-320 ft.	Variable 0-320 ft.
GENERAL:		
Minimum Aisle U-Turn	56"	56"
Sound Level:	68 dBA	68 dBA
Cleaning Width & Rate/Hour:	26D: 28,600 sq. ft./hr. 30D: 33,000 sq. ft./hr. 34D: 37,400 sq. ft./hr.	24C: 26,400 sq. ft./hr. 27C: 29,700 sq. ft./hr. 30C: 33,000 sq. ft./hr. 34C: 37,400 sq. ft./hr.

RPS CORPORATION

P.O. Box 368
Racine, WI 53401
Phone: (800)634-4060
Fax: (866)901-3335

© RPS Corporation 2008.
All Rights Reserved.

Since our policy is one of constant improvement,
all specifications are subject to change without notice.

AUTHORIZED DISTRIBUTOR